

## 产品介绍 — INTRODUCTION




YS62Q1BR-\*A



CW12B-\*A-S



CW12B-(3~40)A-B

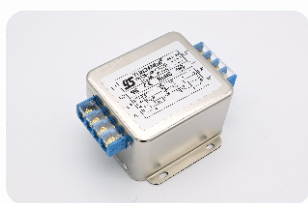

CW12B-(3~40)A-S(005)



CW12B- (50~60) A-R



CW12B- (50~60) A-S(005)

- 三相交流电源滤波器  
Three-phase AC filters
  - 多种出线方式可供选择  
Multiple connection to choose from
  - 含共模线圈  
With common mode coil
  - 多种安装方式可供选择  
Multiple installation methods to choose from

## 产品特点 FEATURE

-  **CW12B-\*(A)-S**  
螺丝固定螺栓出线滤波器  
Screw bolt connection filter  
by screw fixed
  -  **CW12B-(3~40)A-S(005)**  
螺丝固定端子排出线滤波器  
Terminal block connection filter by side guide rail fixed
  -  **CW12B-(50~60)A-S(005)**  
螺丝固定欧式端子出线滤波器  
European style terminal block connection filter by screw fixed
  -  **CW12B-(3~40)A-R**  
侧面导轨固定端子排出线滤波器  
Terminal block connection filter by side guide rail fixed
  -  **CW12B-(50~60)A-R**  
侧面导轨欧式端子出线滤波器  
Screw bolt connection filter by screw fixed
  -  **YS62Q1BR-\*(A)**  
底部导轨固定端子排出线滤波器  
Terminal block connection filter by bottom guide rail fixed

## 应用范围 — APPLICATION

- |                                                 |                                                 |                                          |
|-------------------------------------------------|-------------------------------------------------|------------------------------------------|
| ■ 电子电气设备<br>Electrical and Electronic Equipment | ■ 医疗设备<br>Medical Equipment                     | ■ 办公自动化设备<br>Office Automation Equipment |
| ■ 消费电子<br>Consumer Electronic Production        | ■ 数据通讯设备<br>Data Communication                  | ■ 变频器<br>Frequency converter             |
| ■ 机械设备<br>Mechanical equipment                  | ■ 三相工业设备<br>Three-phase industrial<br>euiptment | ■ 各类电力设备<br>Power equipment of all kinds |


## 技术参数 — TECHNICAL DATA

- |                                                                            |                                     |
|----------------------------------------------------------------------------|-------------------------------------|
| 额定电压 / Rated Voltage : 115/250/380/440V AC                                 | 工作频率 / Working Frequency : 50/60Hz  |
| 额定电流 / Rated Current : 1-60A                                               | 气候类型 / Climatic Category : 25/85/21 |
| 测试电压 / Working Frequency : 1500V DC(Line to Line) 2000V AC(Line to Ground) |                                     |


## 产品列表

| 产品型号<br>Part No. | 额定电流(A)<br>Rate Current | 泄露电流(mA)<br>Leakage Current<br>@250VAC 50Hz | 电路图<br>Schematics | 外形尺寸<br>Dimension | 出线方式<br>Connection                                                                                                                                                         | 安装方式<br>Installation | 重量(g)<br>Weigh | 安规认证<br>Certification                                                                                                                                                                  |
|------------------|-------------------------|---------------------------------------------|-------------------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CW12B-•A-S       | 3~60                    | <2.1                                        | B10               | A21               |                                                                                         | 螺丝<br>Screw          | 879            | CE RoHS<br>  |
| CW12B-•A-S(005)  | 3/6/10/20/30/40         | <2.1                                        | B10               | A23               |                                                                                         | 螺丝<br>Screw          | 827            | CE RoHS<br>  |
| CW12B-•A-R       | 3/6/10/20/30/40         | <2.1                                        | B10               | A24               |                                                                                                                                                                            | 导轨<br>Rail           | 830            | CE RoHS<br>  |
| YS62Q1BR-•A      | 3/6/10/20/30            | <0.6                                        | B10               | A46               |                                                                                                                                                                            | 导轨<br>Rail           | 342            | RoHS CE                                                                                                                                                                                |
| CW12B-•A-R       | 50/60                   | <2.1                                        | B12               | A54               | <br> | 导轨<br>Rail           | 830            | RoHS CE                                                                                                                                                                                |
| CW12B-•A-S(005)  | 50/60                   | <2.1                                        | B12               | A53               |                                                                                                                                                                            | 螺丝<br>Screw          | 827            | RoHS CE                                                                                                                                                                                |


外形尺寸(mm)  
DIMENSION

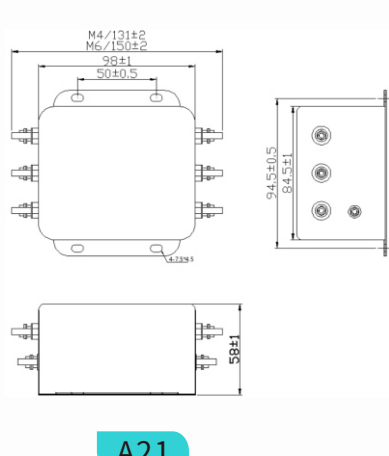


A21

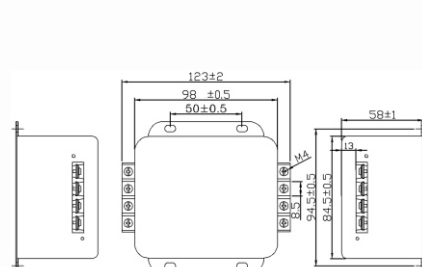


A23

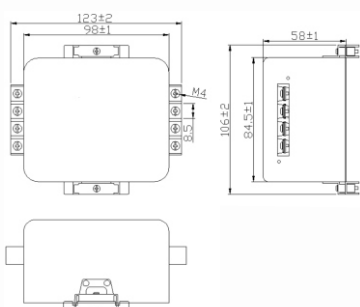


A24

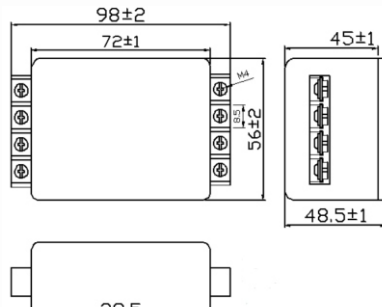

A46

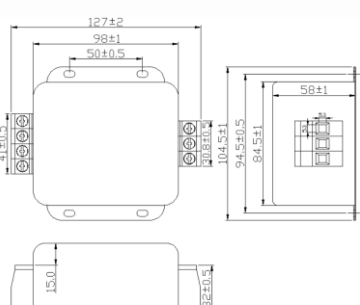


A53

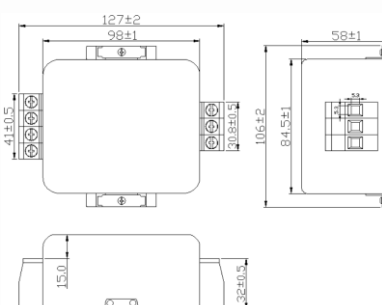


A54

电路图 —  
SCHEMATICS

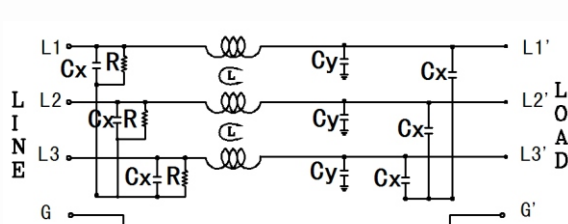

B10

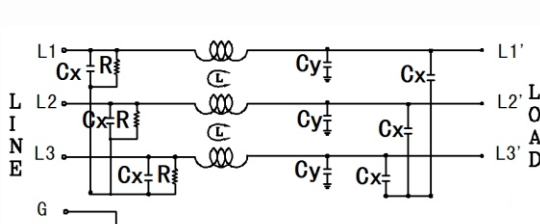

B12

专业电源滤波器制造商  
Professional power filters from manufacturer